



BoSpray

Acoustical spray plaster

BOWIQ
beyond acoustics

Content

- 1) BoSpray the product
- 2) Projects

The product

Acoustical spray plaster



BoSpray

Cellulose based acoustical spray plaster

- 1) Recycled cellulose 80%
- 2) NRC(Noise Reduction Coefficient) = 0.60 – 0.95
- 3) Fire retardant (EN13501-1) class B s1 d0
- 4)  LEED & BREEAM credits



BoSpray

High sound absorption



NRC(Noise Reduction Coefficient) = 0.65 – 0.95

15 mm: NRC 0.65(Class D)

25 mm: NRC 0.75(Class C)

37.5 mm: NRC 0.85(Class B)

40 mm: NRC 0.95(Class A)

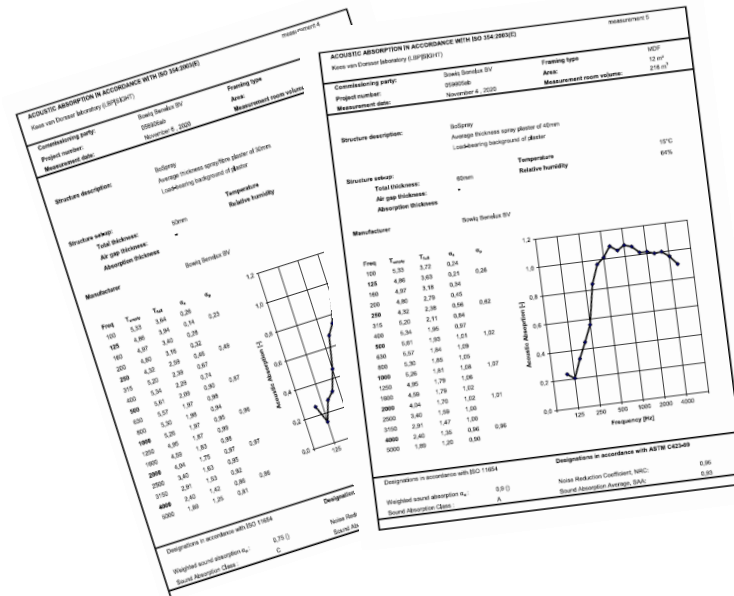

[illegible]

BoSpray



LEED® Contribution Points V2.2

2 Credits for recycled content

3 Credit for low **VOC** emitting material

2 Credits locally sourced material*

* Low carbon footprint

BREEAM®

HEA05, 1 credit(Acoustical performance)

HEA02, 1 credit(Internal air quality)



Projects in Europe

BOWIQ
beyond acoustics




Hall, United kingdom



Housing, The Netherlands



Restaurant, The Netherlands

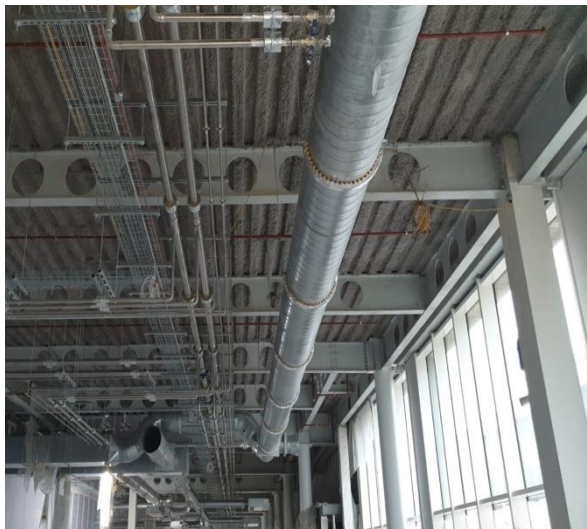

Office in Sheffield, UK



Office in Dublin, Ireland




Office in Reading, UK

Projects in the Middle East


BOWIQ
beyond acoustics




Expo 2020 Siemen HQ, Dubai

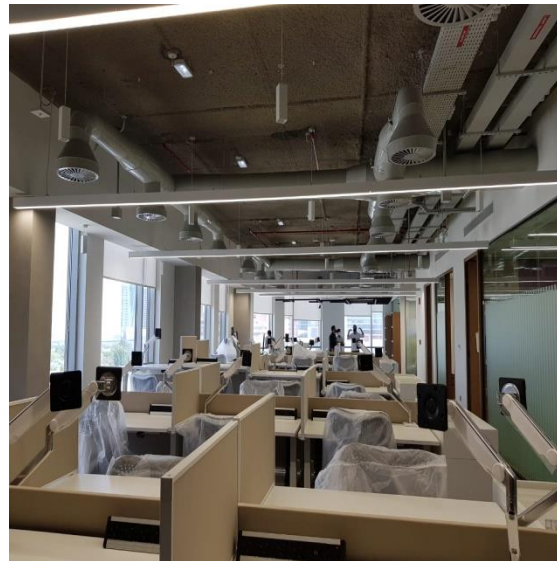


VIP Office, Dubai Media City

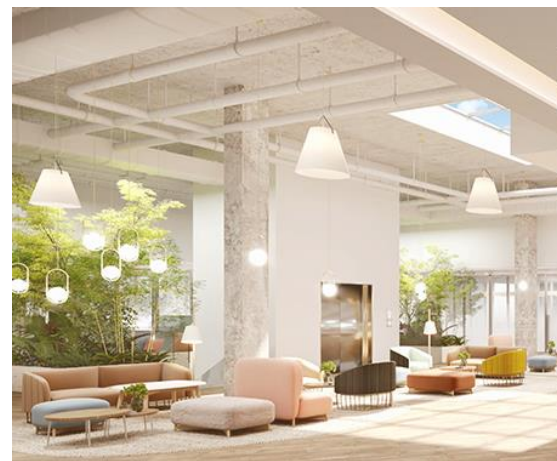

Yas mall, Abu Dhabi

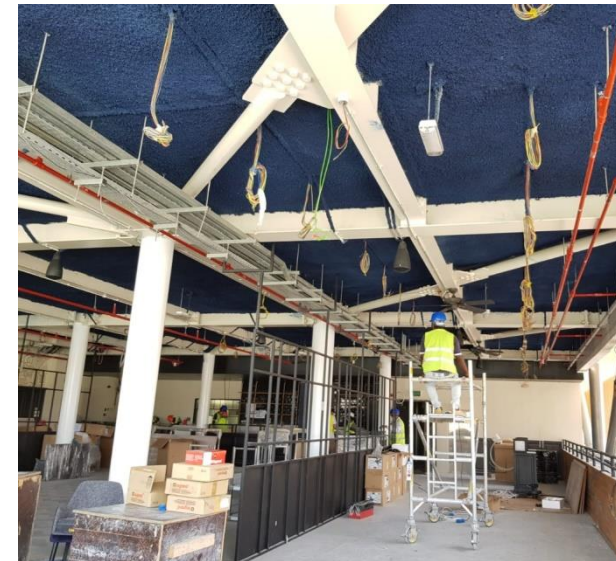

Expo 2020 Belgium Pavilion

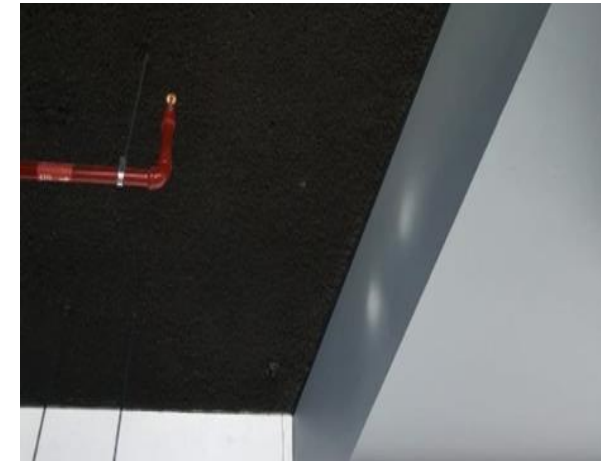

Ubora Tower office, Dubai

Where we are

Head office
Sales office
Partners

